SAROVAR

M.G. Rajashekhar
Hydro Geologist M.Sc, (Geo), D.E.G., FGS
Ground Water & Rain Water Harvesting Consultant

Yield Report

6½" dia Bore well drilled at
Site No 16, Kalinda Sagar
Layout, near 'A' Channel.

Yield test conducted for 3 hrs

359, 13th Cross, 3rd Block, BEL Layout, Vidyaranyapuram, Bangalore-560 097.
Tel : +91-80-23644118 Mobile : 9880099118 Email : mgthimma@gmail.com

Scanned by CamScanner

GROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL

DATA OF SURVEY

a) Name of the Party : BBMP, Ward 78

b) Location of the Site : Karnataka Bagalur Road

c) Area of the land : Near 'A' cross. Road

INVESTIGATION REPORT

1) GEOLOGY OF THE AREA : Granite

2) Recommended Site for drilling : W1

3) Total depth to be drilled : 1000/1200'

4) Approx. casing pipe required : 130'-140'

5) No. of water bearing Zones : — 4 —

6) No. of favorable spots marked : — 1 —

7) Qty. of water expected : 2 1/2 3"

8) Method of survey carried out : Geophysical

9) Remarks : 6 1/2" dia Rock Mat- W1

230'-1140'

P.T.O. : Terms & Conditions

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

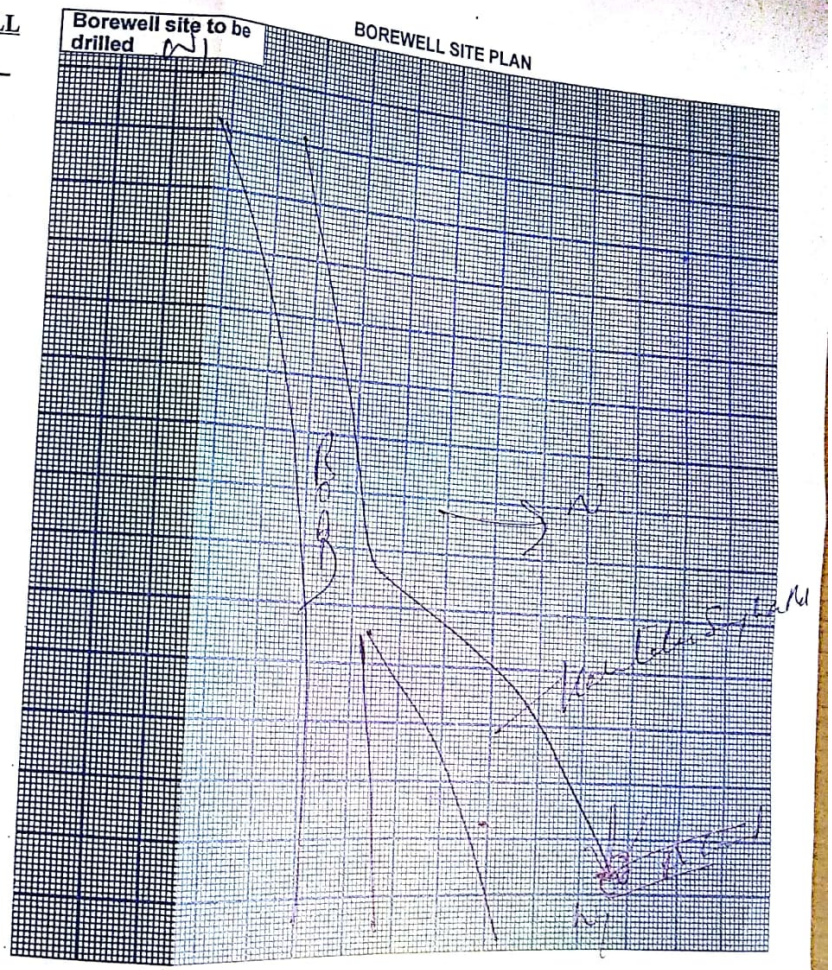

Scanned by CamScanner

SAROVAR

M.G. Rajashekhar
Hydro Geologist M.Sc, (Geo), D.E.G., FGS
Ground Water & Rain Water Harvesting Consultant

Yield details

6½" dia borewell drilled at house no '16
Near Anjaneya temple ward office

Yield 15 L Condition at the time 3 H

359, 13th Cross, 3rd Block, BEL Layout, Vidyaranyapuram, Bangalore-560 097.
Tel : +91-80-23644118 Mobile : 9880099118 Email : mgthimma@gmail.com

Scanned by CamScanner

GROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL
DATA OF SURVEY

a) Name of the Party : B Bommanna 2016

b) Location of the Site : Near Anganwadi Kuppli

c) Area of the land : Wald Office

INVESTIGATION REPORT

1) GEOLOGY OF THE AREA : Granite gneiss

2) Recommended Site for drilling : W1

3) Total depth to be drilled : 1000'-1200'

4) Approx. casing pipe required : 130'-140'

5) No. of water bearing Zones : — 4 —

6) No. of favorable spots marked : — 1 —

7) Qty. of water expected : 2"-3"

8) Method of survey carried out : Geophysical

9) Remarks : 6½" dia Mod-W1

1200'-1400'

P.T.O. : Terms & Conditions

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

BOREWELL SITE PLAN

Borewell site to be drilled

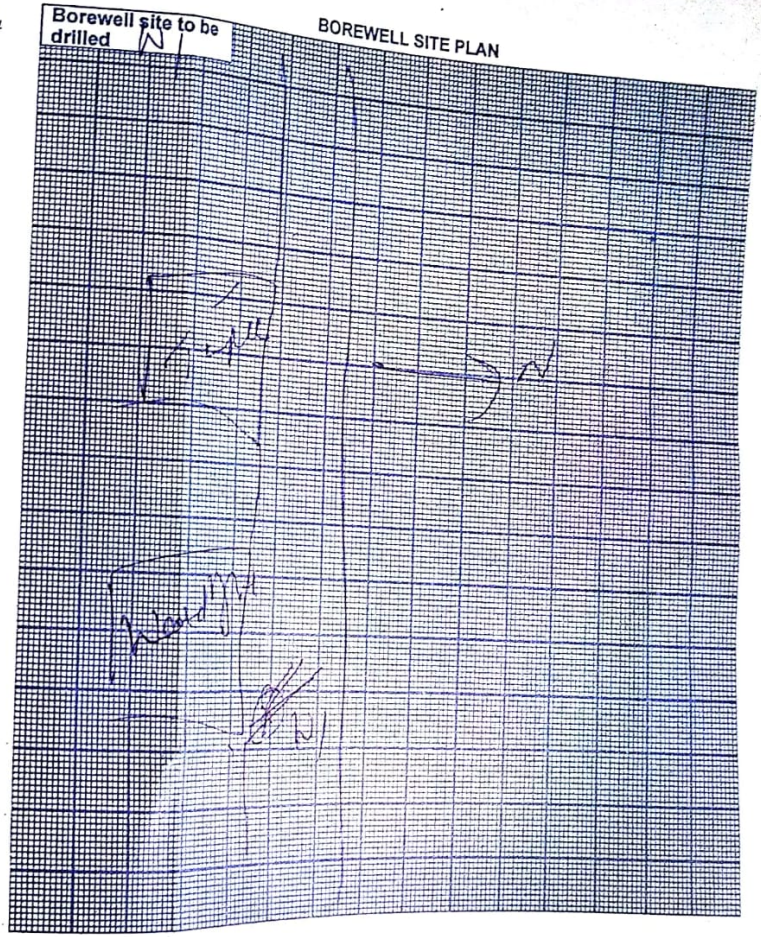

Scanned by CamScanner

SAROVAR

M.G. Rajashekhar
Hydro Geologist M.Sc, (Geo), D.E.G., FGS
Ground Water & Rain Water Harvesting Consultant

Yeshwanthpur

6 1/2" dia Bore drilled at under HP
Near Bangalore One, Patel
Hanuman Road,
Yielding Condition - Full bore 3"

359, 13th Cross, 3rd Block, BEL Layout, Vidyaranyapuram, Bangalore-560 097.
Tel : +91-80-23644118 Mobile : 9880099118 Email : mgthimma@gmail.com

Scanned by CamScanner

GROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL
~~DATA~~ OF SURVEY

a) Name of the Party : BTS Ground Flr, 16
b) Location of the Site : Patel Hamida Road Near
c) Area of the land : Bangalore One

INVESTIGATION REPORT

1) GEOLOGY OF THE AREA : Granite

2) Recommended Site for drilling : W1
3) Total depth to be drilled : 1000 L 1200
4) Approx. casing pipe required : 115 L 130
5) No. of water bearing Zones : 4
6) No. of favorable spots marked : 1
7) Qty. of water expected : 2 L 3 M
8) Method of survey carried out : Geophysical
9) Remarks : 6½ dia Bore Well - W1

240 L 1100

P.T.O. : Terms & Conditions

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

BOREWELL SITE PLAN

Borewell site to be drilled

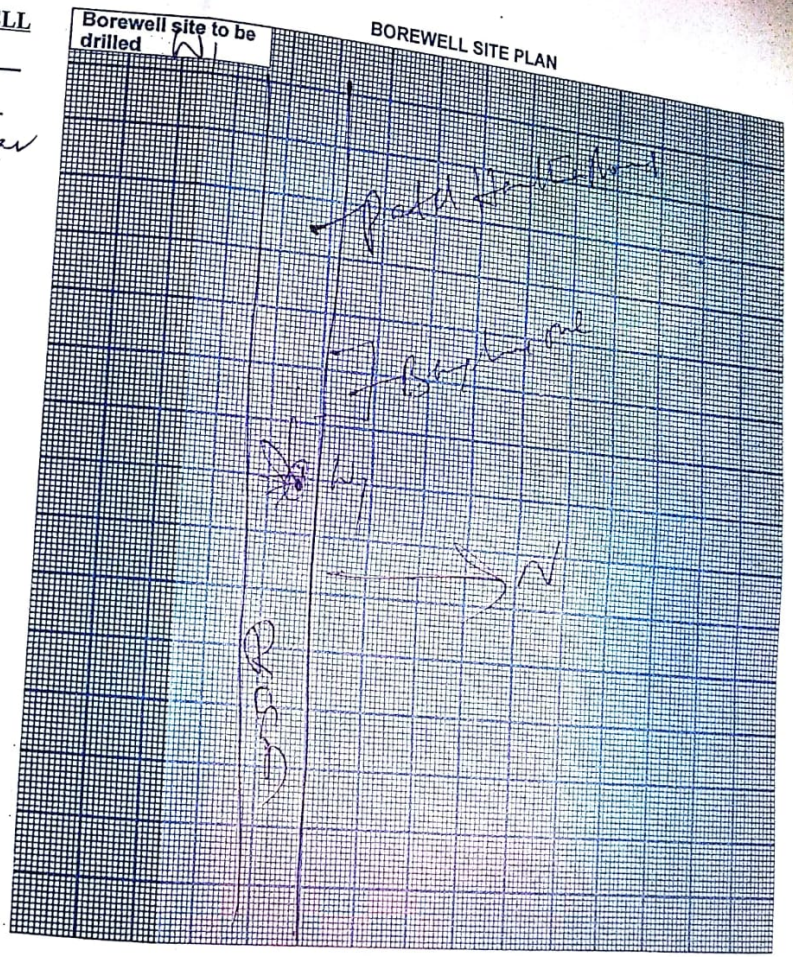

Scanned by CamScanner

SAROVAR

M.G. Rajashekhar
Hydro Geologist M.Sc, (Geo), D.E.G., FGS
Ground Water & Rain Water Harvesting Consultant

Yield report

6½" dia borewell drilled at
Indiv'lt, Muneshwara Temple
Near Sambani

Yield tested and found to be 3 lpm

359, 13th Cross, 3rd Block, BEL Layout, Vidyaranyapuram, Bangalore-560 097.
Tel : +91-80-23644118 Mobile : 9880099118 Email : mgthimma@gmail.com

Scanned by CamScanner

GROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL

a) Name of the Party : BB Mines

DATE OF SURVEY : 2016

b) Location of the Site : Mallenahalli Near Bantwal

c) Area of the land :

INVESTIGATION REPORT

1) GEOLOGY OF THE AREA : Granite

2) Recommended Site for drilling : W1

3) Total depth to be drilled : 1000'-1200'

4) Approx. casing pipe required : 140'-150'

5) No. of water bearing Zones : 4

6) No. of favorable spots marked : 1

7) Qty. of water expected : 2" 3"

8) Method of survey carried out : Geophysical

9) Remarks : 6 1/2" dia DTH - W1

280'-1100'

P.T.O. : Terms & Conditions

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

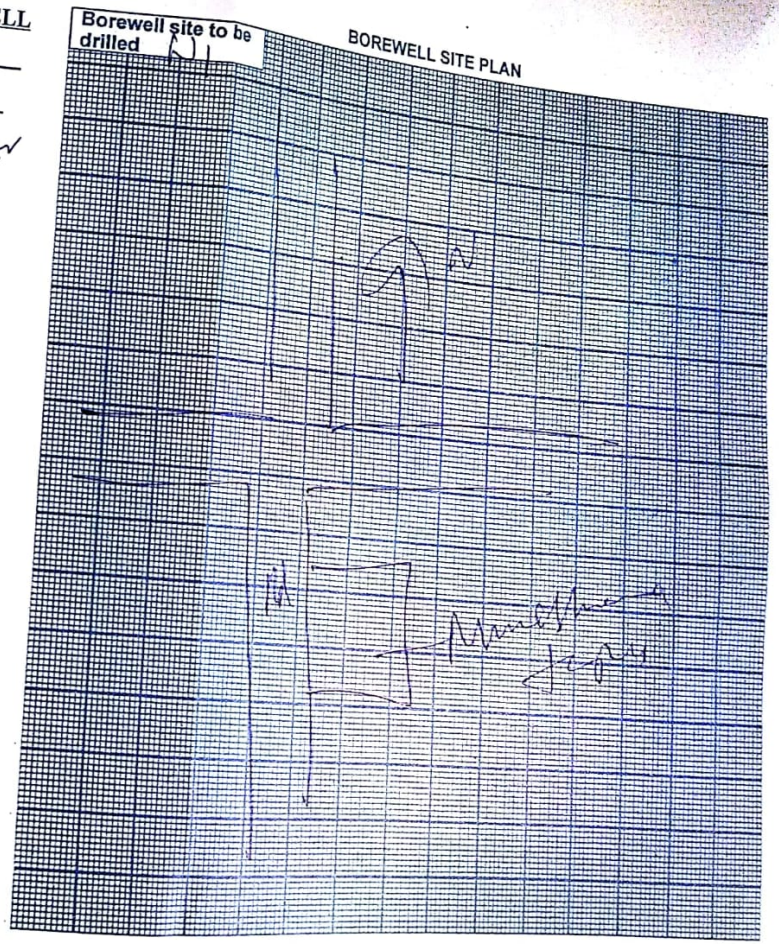

Scanned by CamScanner